


REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	7/11/2013	DCA

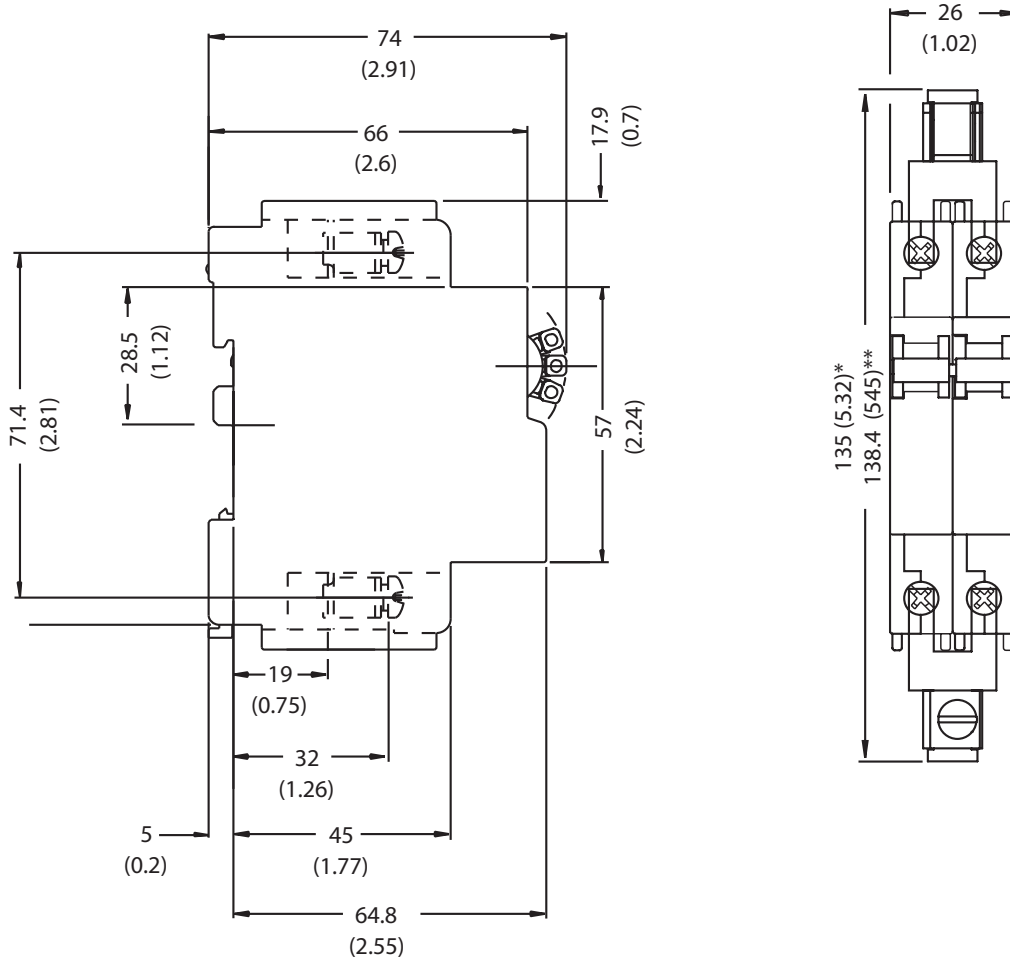

Hydraulic-magnetic for reduced nuisance tripping
 Breakers hold 100% rated current independent of ambient temperature
 QY Frame 26 mm width
 Dinrail (Dual) mount

Specifications:
 Max. Voltage 150VDC
 Max. Interrupting Capacity 10 kA rms
 Trip MNEPV80 80AMPS MNEPV100 100Amps
 ETL Listed to 150VDC

NOTE: DIMENSIONS IN BRACKETS ARE IN "INCHES"
 * Dimension as shipped
 ** Dimension after bending lug (Optional).
 Overall height will vary slightly.



17722 67th AVE N.E.
 ARLINGTON, WA
 98223 USA

DOC TITLE

MNEPV80 / 100 Dimensions

DRAWN BY DCA

DATE 7/11/13

DOC NUMBER

MNEPV80 / 100

SHT 1 of 1