


NOTES: UNLESS OTHERWISE SPECIFIED



1. SEE DRAWING NO. CB-00312 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

REMOVABLE  
TERMINAL  
PROTECTOR



REFERENCE VIEW

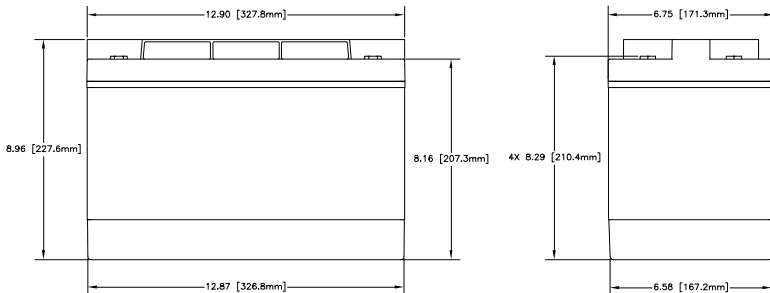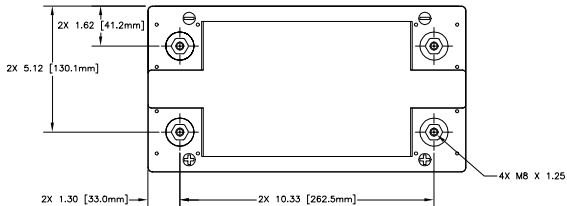

CAPACITY RATE		
PART NUMBER	PVX-5340T	PVX-6480T
NOMINAL WEIGHT	62 LBS [28.2 KG]	70 LBS [31.8 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	534 AH	648 AH

ENVELOPE DRAWING

REV	DATE	PART NO. DESCRIPTION NO.	MANUFACTURE OR DESCRIPTION	UNIT DESCRIPTION	QTY
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONTRACT NO.		
FRACTIONS	DECIMALS	ANGLES	APPENDIX	DATE	TITLE
1/32	.001	1/16°	NA	8/13/01	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDEINO RD., W. COVINA, CA 91790 BATTERY, SLA, 2 VOLT, PVX-6480T SERIES
TREATMENT	NONE	CHECKED	DATE	BY	REV
FINISH	NONE	APPROVED	8/21/01	C	63017
SIMILAR TO	NONE	APPROVED	8/23/01	DATE	REV
NO.	REV	BY	DATE	BY	NO.
		AT	8/24/01	SCALE	NONE