
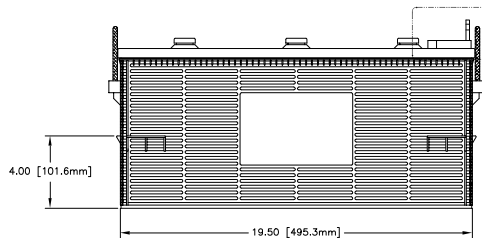




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00302 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION, PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

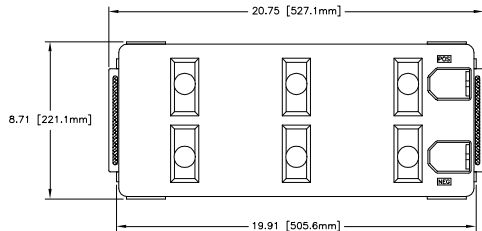

PVX-2120 TERMINAL OPTIONS



CAPACITY RATINGS	
PART NUMBER	PVX-2120
NOMINAL WEIGHT	138 LBS[62.7 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	212 AH

ENVELOPE DRAWING

REV	DATE	DESCRIPTION	APPROVED	DATE	TITLE	DWG NO.	REV
1	8/13/01	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790	NA	8/13/01	BATTERY, SLA, 12 VOLT, PVX-2120	63017	1
2	8/21/01		ELH	8/21/01			
3	8/23/01		JBT	8/23/01			
4	8/24/01		AT	8/24/01			